

□□□ , □□ -□□ , 630 A IEC, □ ,
□□□□□

Data Solutions

???

SB630



nVent ERIFLEX

????????????????????(???????)??/?????? DIN
????/?????????????????????????????????

????????????????????4????nVent ERIFLEX Flexibar Advanced,
??IBSB Advanced ?????

??



??

???????????????? nVent ERIFLEX Flexibar Advanced ? IBSB Advanced ?????

????????????????

????????????????????????????

????????????

????????????????????

????????????????????

????? DIN ?????????????

??????????

??? 95%

????????????????????(RoHS) ??


?? EN 45545???? R23 ?? HL3 ??? R22 ?? HL2 ?

?????????? ??????

???: 561156
?: ??
?: ??-??
????????IEC: 630A
?: ?; ???
????????IEC: 500 mm²
????????IEC: 500 mm²
????? (ICW) 1 ?: 60kA
?????IEC: 870A
?????UL: 545A
????? (Ipk): 51kA
??????? (ICC): 24.3kA
????? (SCCR): 100kA
?????IEC (Ui): 1000; 1500
?????UL (Vin): 1250
??????: 1
?????????: 240 - 500 mm²; 400 - 1,000 kcmil
?????????: 240 - 500 mm²; 400 - 1,000 kcmil
??????: 1
???????? - ??: 240 - 500 mm²
?? (D): 89.4mm
?? (H): 174.4mm
?? (W): 54.2mm
????: 1.2kg
?????: UL® 1059
?: IEC® 60947-7-1
?????: IP 20
?????: UL® 94V-0

????????????????7%

nVent.com | 2

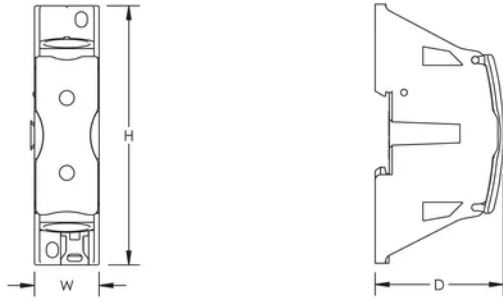

???? nVent ?????????????? nVent ??????? www.nvent.com ?????????? nVent ?????????????????????????????????????? nVent
??/????????????



?????????:
CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE